


CTP-SMB-311-75

SMB SERIES
PCB MOUNT, RIGHT ANGLE

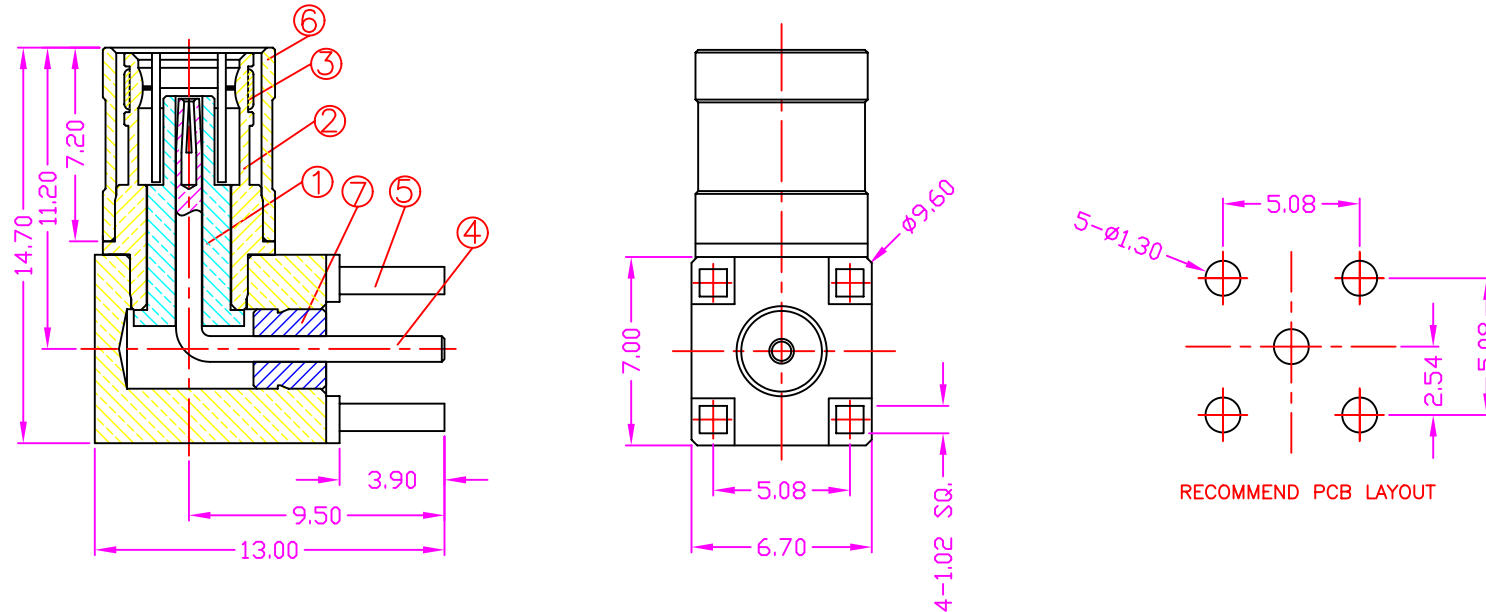

MATERIALS

1. INSULATOR : TEFLON UL94V-0, WHITE
2. BODY : BRASS, GOLD PLATED
3. RETAINING RING : BERYLLIUM, GOLD PLATED
4. PIN : PHOSPHOR BRONZE, GOLD PLATED
5. BODY : BRASS, GOLD PLATED
6. SHELL : BRASS, GOLD PLATED
7. INSULATOR : TEFLON UL94V-0, WHITE

TOLERANCES

X.X	±0.2
X.XX	±0.15
X.XXX	±0.1
Angle	±5°

OTHER INFORMATION

1. CONTACT RESISTANCE : 6.0m OHMS MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 750V AC RMS FOR 1 MINUTE
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC
4. OPERATING TEMPERATURE : -65°C ~ +165°C

Phone 1-800-809-2751



Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579