


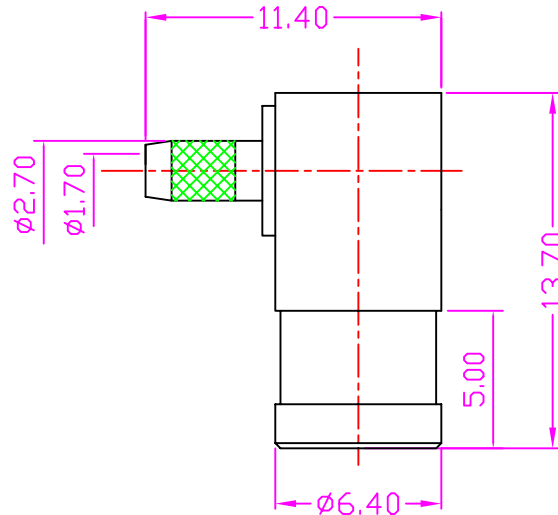


CTP-SMB-501-50

SMB SERIES
CRIMP, RIGHT ANGLE
50 OHM, FOR RG174/ 316 CABLE



RECOMMENDED
HEX CRIMP DIMENSION
FOR RG174/ 316



OTHER INFORMATION

1. CONTACT RESISTANCE : 6.0m OHMS MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE : 750V AC RMS FOR 1 MINUTE
3. INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC
4. OPERATING TEMPERATURE : $-65^{\circ}\text{C} \sim +165^{\circ}\text{C}$

7	Retaining ring	1	Brass	GLDD
6	CAP	1	Brass	GOLD
5	Ferrule	1	Brass	GLDD
4	Dielectric	1	Teflon	None
3	Pin	1	Phos Bronze	Gold
2	Body	1	Brass	GLDD
1	Body	1	Brass	GLDD
NO	Description	Qty	Material	Finish



Phone 1-800-809-2751

Fax 1-510-440-0579

www.connect-tech-products.com • info@connect-tech-products.com

4428 Technology Drive • Fremont, CA 94538, USA • 510-498-8815 • Fax: 510-440-0579