

PART NUMBER
CTP - 22AA - 0 4 * T - 1 0 - 0 1 2

SERIES _____


NO. OF POS. _____

FEMALE

TIN PLATED ON SOLDER TAIL
(CONTACT PLATED OPTION)

1: GOLD FLASH
6: 30u" GOLD

RECOMMENDED PCB LAYOUT

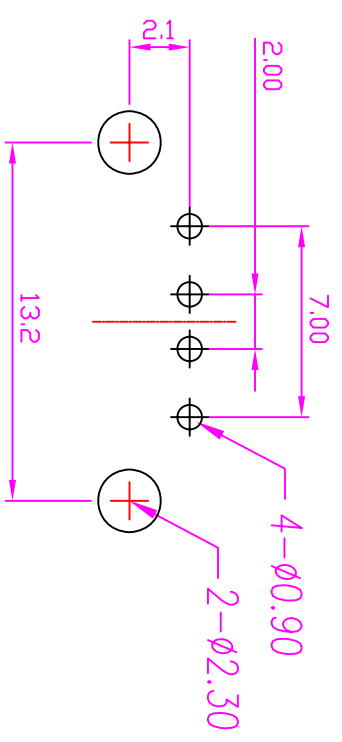

- MATERIALS**
- INSULATOR : THERMOPLASTIC UL94V-0
 - SHIELD : BRASS, NICKEL PLATED (t=0.30mm)
 - CONTACT : PHOSPHOR BRONZE

OTHER INFORMATION

- CONTACT RESISTANCE : 30m OHMS MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC RMS FOR 1 MINUTE
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC
- CURRENT RATING : 1 AMP. MAX.
- OPERATING TEMPERATURE : -25°C ~ +85°C

Connect-Tech Products Corp.
 TEL:+1 510 4400578 www.Connect-Tech-Products.com

TOLERANCES	XX ±0.3	XX ±0.2	XX ±0.1	Angle ±5°
TITLE	USB SERIES PCB MOUNT, VERTICAL, A TYPE METAL SHIELD, FEMALE			
DRAWN BY	Gardos		CHECKED BY	Q. Q. W.
UNIT	MM	SCALE	NONE	SIZE A4
DRAW NO.	D022-AA012		REV.	A

REV.	DATE	DESCRIPTION
A	0721.2003	RELEASE