


**MATERIALS**  
 HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK  
 TERMINAL: PHOSPHOR BRONZE, GOLD PLATED

**SPECIFICATION**  
 CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -25°C~+85°C

**PART NUMBER**  
 CTP - 40GB - 0 8 1 T - 0 3 0  
 SERIES }  
 NUMBER OF POS. } TIN PLATED ON TAIL  
 GOLD FLASH ON CONTACT

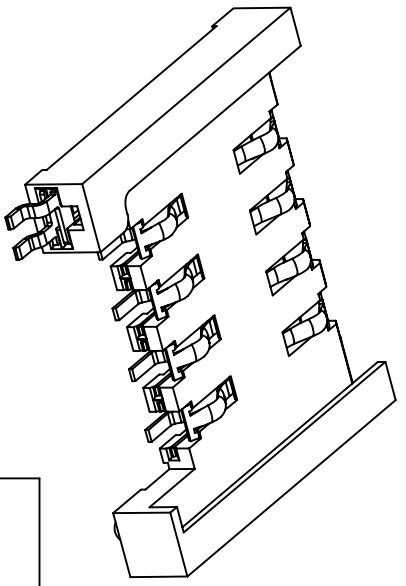

P.C.B LAYOUT  
 TOP VIEW ±0.05

**Connect-Tech Products Corp.**  
 TEL:+1 510 4400578 www.Connect-Tech-Products.com

**TOLERANCES**  
 XX ±0.3  
 X.XX ±0.2  
 X.XXX ±0.1  
 Angle ±5°

**UNIT** MM  
**SCALE** NONE  
**SIZE** A4  
**DRAW NO.** D040-GB030  
**REV.** A

**DRIVEN BY** *J.G.W.*  
**CHECKED BY** *L.J.W.*  
**APPROVED BY** *Shing*

REV.	DATE	DESCRIPTION	RELEASE
A	0921,2009		